




Made in the USA Since 1946

Non-Metallic Strain Relief Cord Connectors Size Range 1/2" to 1"

- Utilized with portable cord to provide strain relief termination
- For use in wet or dry locations
- Oil, water, dust, resistant NEMA 4X IP68
- Stands up to most industrial corrosive environments
- Extended cord range to reduce inventory
- Tightening on nut creates a watertight seal
- Neoprene bushings cover a large cable range, reducing the number of different sized fittings required

Material: Type 6/6 Nylon Color: Industrial Grey
Sealing Grommet: Neoprene
Temperature Range: -30° to 105°C Short Term: 150°C
Flame Resistance: UL 94vo, incandescent Wire

UL Standard 514B • CUL to CSA Standard C22.2 No.18
Environmental Rating: IP68 • NEMA 4X Watertight

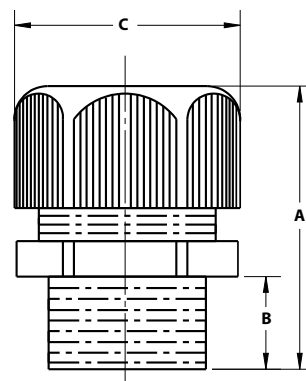

Cat. #	Trade Size	Unit Qty.	Std. Pkg.	Wt./per 100
NMCG50-1	1/2"	25	125	3
NMCG50-2	1/2"	25	125	3
NMCG75-1	3/4"	10	100	6
NMCG75-2	3/4"	10	100	6
NMCG100-1	1"	10	100	9
NMCG100-2	1"	10	100	9

Cable Ranges					
Cat. #	Trade Size	Min. - Max.	A	B	C
NMCG50-1	1/2"	.170 - .240	1.968"	.590"	.945"
NMCG50-2	1/2"	.236 - .472	1.968"	.590"	.945"
NMCG75-1	3/4"	.250 - .460	2.007"	.590"	1.299"
NMCG75-2	3/4"	.472 - .709	2.007"	.590"	1.299"
NMCG100-1	1"	.470 - .660	2.401"	.748"	1.653"
NMCG100-2	1"	.669 - 1.000	2.401"	.748"	1.653"

NM Cord Connectors R-529.14