



Made in the USA Since 1946

## Reducing Bushings

- Industrial specification grade, screw machined steel, zinc plated
- (N.P.S.) Straight Pipe Thread
- For reducing the threaded opening in conduit bodies or any female threaded fitting
- Product is **RAINTIGHT**




E93605



LR61799

## SPEC-grade

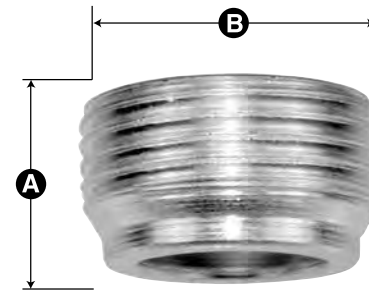

### Steel, Zinc Plated

Cat. #	Size	Unit Ctn	Std Pkg	WT/ 100
RB5038	1/2" x 3/8"	100	1000	2
RB7550	3/4" x 1/2"	100	500	14
RB10050	1" x 1/2"	50	250	12
RB10075	1" x 3/4"	50	250	12
RB12550	1-1/4" x 1/2"	20	200	28
RB12575	1-1/4" x 3/4"	20	200	22
RB125100	1-1/4" x 1"	20	200	14
RB15050	1-1/2" x 1/2"	10	100	42
RB15075	1-1/2" x 3/4"	10	100	36
RB150100	1-1/2" x 1"	10	100	28
RB150125	1-1/2" x 1-1/4"	10	100	12
RB20050	2" x 1/2"	5	50	84
RB20075	2" x 3/4"	5	50	76
RB200100	2" x 1"	5	50	68
RB200125	2" x 1-1/4"	5	50	48
RB200150	2" x 1-1/2"	5	50	32

### Dimensional Table

Cat. #	A Length	B Diameter
RB5038	.563	.750
RB7550	.650	.920
RB10050	.715	1.125
RB10075	.715	1.125
RB12550	.820	1.470
RB12575	.820	1.470
RB125100	.820	1.470
RB15050	.850	1.700
RB15075	.850	1.700
RB150100	.850	1.700
RB150125	.850	1.700
RB20050	.970	2.230
RB20075	.970	2.230
RB200100	.970	2.230
RB200125	.970	2.230
RB200150	.970	2.230




Made in the USA Since 1946

## Reducing Bushings

- Industrial specification grade, screw machined steel, zinc plated
- (N.P.S.) Straight Pipe Thread
- For reducing the threaded opening in conduit bodies or any female threaded fitting
- Product is **RAINTIGHT**

## SPEC-grade

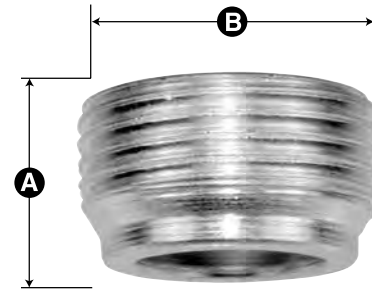

E93605



LR61799

### Malleable Iron

Cat. #	Size	Unit Ctn	Std Pkg	WT/ 100
RB250100	2-1/2" x 1"	-	10	130
RB250125	2-1/2" x 1-1/4"	-	10	140
RB250150	2-1/2" x 1-1/2"	-	10	140
RB250200	2-1/2" x 2"	-	10	110
RB300125	3" x 1-1/4"	-	10	200
RB300150	3" x 1-1/2"	-	10	240
RB300200	3" x 2"	-	10	200
RB300250	3" x 2-1/2"	-	10	170
RB350150	3-1/2" x 1-1/2"	-	10	230
RB350200	3-1/2" x 2"	-	10	230
RB350250	3-1/2" x 2-1/2"	-	10	270
RB350300	3-1/2" x 3"	-	10	250
RB400200	4" x 2"	-	10	350
RB400250	4" x 2-1/2"	-	10	380
RB400300	4" x 3"	-	10	320
RB400350	4" x 3-1/2"	-	10	290

### Dimensional Table

Cat. #	A Length	B Diameter
RB250100	1.563	2.750
RB250125	1.563	2.845
RB250150	1.433	2.900
RB250200	1.433	2.930
RB300125	1.680	3.445
RB300150	1.700	3.750
RB300200	1.635	3.250
RB300250	1.563	3.875
RB350150	1.750	3.900
RB350200	1.750	3.900
RB350250	1.625	4.180
RB350300	1.563	4.630
RB400200	2.070	4.750
RB400250	2.070	4.750
RB400300	2.125	4.750
RB400350	2.250	4.750

Rigid IMC Conduit Fittings



Made in the USA Since 1946


## Reducing Bushings - Suitable for Hazardous Locations

- Industrial specification grade, screw machined steel, zinc plated
- (N.P.T.) Tapered Pipe Thread Outside NPS Inside Thread
- UL Approved for hazardous locations



Class I, Groups C and D; Class II, Groups E, F, and G  
Reducing bushings, Series RB, Cat nos. RB followed by 2, 3, 4, 5, or 6,  
followed by 1, 2, 3, 4, or 5, followed by H. Conduit sizes 1/2" to 2" incl.

## SPEC-grade

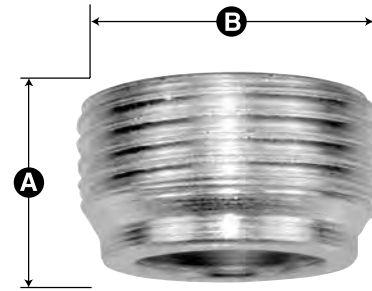

### Steel - Reducing Bushings

Cat. #	Size	Unit Ctn	Std Pkg	WT/ 100
RB21H	3/4" x 1/2"	50	500	6
RB31H	1" x 1/2"	50	250	14
RB32H	1" x 3/4"	50	250	8
RB41H	1-1/4" x 1/2"	20	200	36
RB42H	1-1/4" x 3/4"	20	200	28
RB43H	1-1/4" x 1"	20	200	18
RB51H	1-1/2" x 1/2"	10	100	54
RB52H	1-1/2" x 3/4"	10	100	46
RB53H	1-1/2" x 1"	10	100	36
RB54H	1-1/2" x 1-1/4"	10	100	16
RB61H	2" x 1/2"	5	50	184
RB62H	2" x 3/4"	5	50	168
RB63H	2" x 1"	5	50	144
RB64H	2" x 1-1/4"	5	50	104
RB65H	2" x 1-1/2"	5	50	60

### Dimensional Table

Cat. #	A Length	B Diameter
RB21H	.650	.920
RB31H	.715	1.125
RB32H	.715	1.125
RB41H	.820	1.470
RB42H	.820	1.470
RB43H	.820	1.470
RB51H	.850	1.700
RB52H	.850	1.700
RB53H	.850	1.700
RB54H	.850	1.700
RB61H	.970	2.230
RB62H	.970	2.230
RB63H	.970	2.230
RB64H	.970	2.230
RB65H	.970	2.230

Rigid IMC Conduit Fittings



Made in the USA Since 1946

## Aluminum Reducing Bushings - Suitable for Hazardous Locations


Size Range: 3/4" x 1/2" to 2" x 1-1/2"

- Threaded for Rigid / IMC Conduit
- NPT tapered threads
- Smooth internal bushing provides wire protection
- Explosion proof, approved for hazardous locations
- Dust-ignition proof



UL rated suitable for hazardous locations  
Class I, Div. 1 and 2, Groups A, B, C, D  
Class I, Zone 1 and 2, Groups IIC, IIB, IIA  
Class II, Div. 1 and 2; Groups E, F, G  
Class III, Div. 1 and 2

**SPEC-grade**



### Aluminum - Reducing Bushings

Cat. #	Size	A OAL	B ø	C ø	Unit Qty	Std. Pkg	WT/ 100
RBA21H	3/4" x 1/2"	.75"	.94"	0.60"	50	500	3
RBA31H	1" x 1/2"	.75"	1.15"	0.60"	50	250	6
RBA32H	1" x 3/4"	.75"	1.15"	0.80"	50	250	4
RBA41H	1 1/4" x 1/2"	.81"	1.52"	0.60"	20	200	12
RBA42H	1 1/4" x 3/4"	.81"	1.52"	0.80"	20	200	10
RBA43H	1 1/4" x 1"	.88"	1.52"	1.02"	20	200	7
RBA51H	1 1/2" x 1/2"	.88"	1.75"	0.60"	10	100	19
RBA52H	1 1/2" x 3/4"	.88"	1.75"	0.80"	10	100	16
RBA53H	1 1/2" x 1"	.88"	1.75"	1.02"	10	100	13
RBA54H	1 1/2" x 1 1/4"	.94"	1.75"	1.36"	10	100	7
RBA61H	2" x 1/2"	.88"	2.23"	0.60"	5	50	33
RBA62H	2" x 3/4"	.88"	2.23"	0.80"	5	50	31
RBA63H	2" x 1"	.88"	2.23"	1.02"	5	50	27
RBA64H	2" x 1 1/4"	.94"	2.23"	1.36"	5	50	22
RBA65H	2" x 1 1/2"	1.00"	2.23"	1.60"	5	50	17

Rigid IMC Conduit Fittings