




Made in the USA Since 1946

## Liquid Tight Connectors with Stainless Steel Mesh Grips

- Prevents pullout from motion, strain and stress
- Multi-weave stainless steel mesh
- Suitable for hazardous locations, Class I, Div. 2; Class II, Div. 1&2; Class III, Div. 1&2
- Sealing washer and locknut included
- Includes insulated throat
- Reusable

**SPEC-grade**

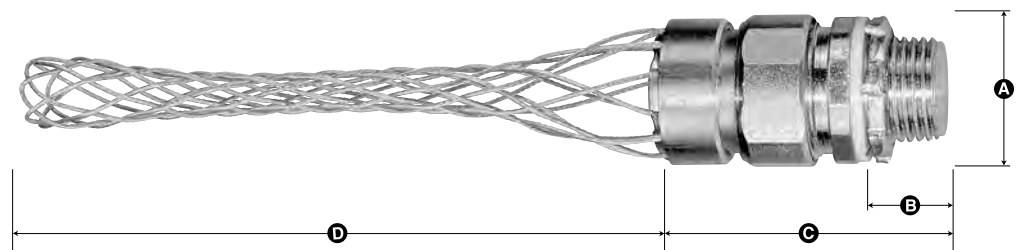

### Straight Connectors

Cat. #	Size	Std Pkg	WT/100
STR38GT	3/8"	10	15
STR50GT	1/2"	10	20
STR75GT	3/4"	10	25
STR100GT	1"	10	35
STR125GT	1-1/4"	2	60
STR150GT	1-1/2"	2	85
STR200GT	2"	2	130

### Dimensional Table

Cat. #	A Diameter	B Length of Thread	C Connector Length	D Mesh Length
STR38GT	1.06	.59	1.43	6.00
STR50GT	1.19	.59	1.43	5.25
STR75GT	1.38	.59	1.56	6.50
STR100GT	1.69	.66	1.69	7.75
STR125GT	2.06	.63	2.03	10.63
STR150GT	2.38	.63	2.22	11.00
STR200GT	2.88	.66	2.28	14.00

Wire Mesh LT 1

\*Larger sizes available upon request



Made in the USA Since 1946

## Liquid Tight Connectors with Stainless Steel Mesh Grips

- Prevents pullout from motion, strain and stress
- Multi-weave stainless steel mesh
- Suitable for hazardous locations, Class I, Div. 2; Class II, Div. 1&2; Class III, Div. 1&2
- Sealing washer and locknut included
- Includes insulated throat
- Reusable


**SPEC-grade**



E93605



LR61799

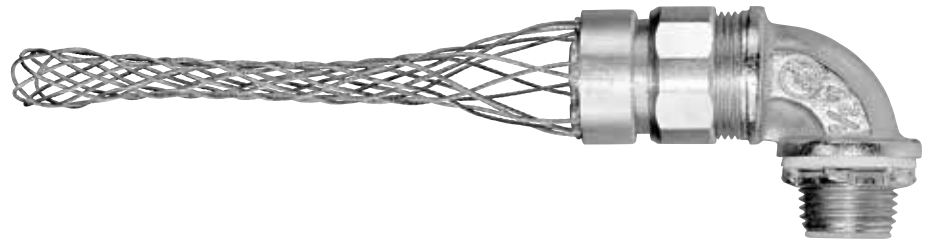

### 90° Angle

Cat. #	Size	Std Pkg	WT/100
STR3890GT	3/8"	10	25
STR5090GT	1/2"	10	25
STR7590GT	3/4"	10	40
STR10090GT	1"	10	70
STR12590GT	1-1/4"	2	95
STR15090GT	1-1/2"	2	130
STR20090GT	2"	2	195

\* Larger sizes available upon request

### Dimensional Table

Cat. #	Mesh Length
STR3890GT	6.00
STR5090GT	5.25
STR7590GT	6.50
STR10090GT	7.75
STR12590GT	10.63
STR15090GT	11.00
STR20090GT	14.00

Wire Mesh IT SS 2



Made in the USA Since 1946

## Liquid Tight Connectors with Stainless Steel Mesh Grips

- Prevents pullout from motion, strain and stress
- Multi-weave stainless steel mesh
- Suitable for hazardous locations, Class I, Div. 2; Class II, Div. 1&2; Class III, Div. 1&2
- Sealing washer and locknut included
- Includes insulated throat
- Reusable


**SPEC-grade**



E93605



LR61799

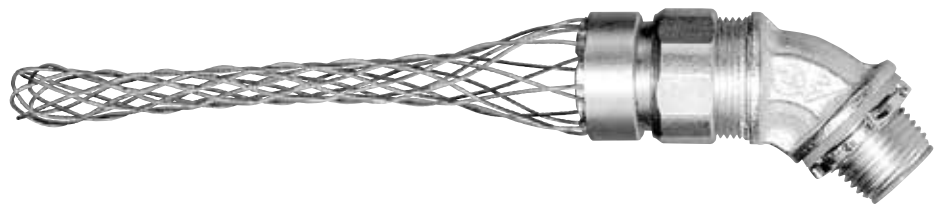

### 45° Angle

Cat. #	Size	Std Pkg	WT/ 100
STR3845GT	3/8"	10	20
STR5045GT	1/2"	10	22
STR7545GT	3/4"	10	35
STR10045GT	1"	10	65
STR12545GT	1-1/4"	2	85
STR15045GT	1-1/2"	2	115
STR20045GT	2"	2	175

### Dimensional Table

Cat. #	Mesh Length
STR3845GT	6.00
STR5045GT	5.25
STR7545GT	6.50
STR10045GT	7.75
STR12545GT	10.63
STR15045GT	11.00
STR20045GT	14.00

\* Larger sizes available upon request



## Industrial Grade Cord Grips with Stainless Steel Mesh

- Industrial specification grade screw machined steel, zinc plated
- UL rated Liquid Tight
- Multi-weave stainless steel mesh
- Indoor and outdoor use
- Color coded grommet to indicate cable diameter range and to insure an oil and watertight seal

**SPEC-grade**



### Straight Connectors

Cat. #	Color	Cable Ranges		Std Max	WT/ Pkg	100
		Size	Min.			
CG125C850GT	Purple	1-1/4"	.750	.850	5	48
CG125C950GT	Grey	1-1/4"	.850	.950	5	48
CG125D1050GT	Black	1-1/4"	.950	1.050	5	48
CG125D1150GT	Orange	1-1/4"	1.050	1.150	5	48
CG125D1250GT	Red	1-1/4"	1.150	1.250	5	48
CG125D1375GT	White	1-1/4"	1.250	1.375	5	48
CG150D1050GT	Black	1-1/2"	.950	1.050	2	90
CG150D1150GT	Orange	1-1/2"	1.050	1.150	2	90
CG150D1250GT	Red	1-1/2"	1.150	1.250	2	90
CG150D1375GT	White	1-1/2"	1.250	1.375	2	90
CG150E1500GT	Blue	1-1/2"	1.380	1.500	2	90
CG150E1630GT	Green	1-1/2"	1.500	1.630	2	90
CG150E1750GT	Brown	1-1/2"	1.630	1.750	2	90
CG150E1880GT	Purple	1-1/2"	1.750	1.880	2	90
CG200F1380GT	Red	2"	1.250	1.380	2	125
CG200F1500GT	Blue	2"	1.380	1.500	2	125
CG200F1630GT	Green	2"	1.500	1.630	2	125
CG200F1750GT	Brown	2"	1.630	1.750	2	125
CG200F1810GT	Yellow	2"	1.690	1.810	2	125
CG200F1880GT	Purple	2"	1.750	1.880	2	125
CG200F1940GT	White	2"	1.810	1.940	2	125
CG200F2060GT	Orange	2"	1.940	2.060	2	125

\*\* Cable jacket may have to be stripped to pass through connector body

Wire Mesh CG 4



## Industrial Grade Aluminum Cord Grips with Stainless Steel Mesh

- Screw machined lightweight, durable aluminum
- Resistant to moisture and most normal and hazardous atmospheric conditions
- UL rated Liquid Tight
- Multi-weave stainless steel mesh
- Indoor and outdoor use
- Color coded grommet to indicate cable diameter range and to insure an oil and watertight seal

**SPEC-grade**



### Straight Connectors

Cat. #	Color	Size	Cable Ranges		Std Pkg	WT/ 100
			Min.	Max		
CG1ALGT	Red	1/2"	.150	.250	5	5
CG2ALGT	White	1/2"	.250	.350	5	5
CG3ALGT	Blue	1/2"	.350	.450	5	5
CG4ALGT	Green	1/2"	.450	.560	5	5
CG5ALGT	Brown	1/2"	.560	.650	5	5
CG6ALGT	Red	3/4"	.150	.250	5	8
CG7ALGT	White	3/4"	.250	.350	5	8
CG8ALGT	Blue	3/4"	.350	.450	5	8
CG9ALGT	Green	3/4"	.450	.560	5	10
CG10ALGT	Brown	3/4"	.560	.650	5	10
CG11ALGT	Yellow	3/4"	.650	.750	5	10
CG12ALGT	Purple	3/4"	.750	.850	5	13


Wire Mesh CG 5



## Industrial Grade 90° Cord Grips with Stainless Steel Mesh

- Industrial specification grade steel, zinc plated
- UL rated Liquid Tight
- Multi-weave stainless steel mesh
- Indoor and outdoor use
- Color coded grommet to indicate cable diameter range and to insure an oil and watertight seal

**SPEC-grade**

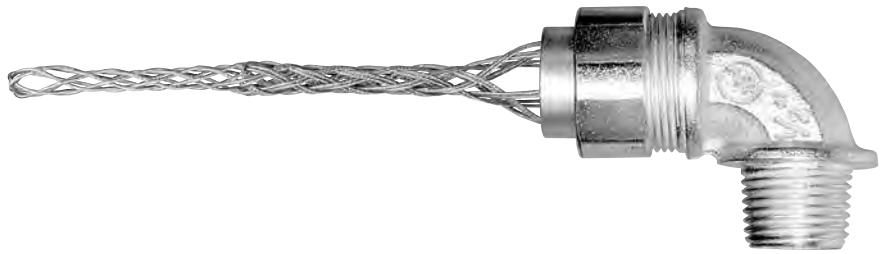

### 90° Angle Connectors


Cat. #	Color	Size	Cable Ranges		Std Pkg	WT/100
			Min.	Max		
CG50A25090GT	Red	1/2"	.150	.250	5	25
CG50A35090GT	White	1/2"	.250	.350	5	25
CG50A45090GT	Blue	1/2"	.350	.450	5	25
CG50A56090GT	Green	1/2"	.450	.560	5	25
CG50A65090GT	Brown	1/2"	.560	.650	5	25
CG75A25090GT	Red	3/4"	.150	.250	5	45
CG75A35090GT	White	3/4"	.250	.350	5	45
CG75A45090GT	Blue	3/4"	.350	.450	5	45
CG75A56090GT	Green	3/4"	.450	.560	5	45
CG75A65090GT	Brown	3/4"	.560	.650	5	45
CG75B75090GT	Yellow	3/4"	.650	.750	5	45
CG75B85090GT	Purple	3/4"	.750	.850	5	45
CG100B56090GT	Green	1"	.450	.560	5	68
CG100B65090GT	Brown	1"	.560	.650	5	68
CG100B75090GT	Yellow	1"	.650	.750	5	68
CG100B85090GT	Purple	1"	.750	.850	5	68
CG100C95090GT	Grey	1"	.860	.950	5	68
CG100C105090GT	Black	1"	.950	1.050	5	68



## Industrial Grade 45° Cord Grips with Stainless Steel Mesh

- Industrial specification grade steel, zinc plated
- UL rated Liquid Tight
- Multi-weave stainless steel mesh
- Indoor and outdoor use
- Color coded grommet to indicate cable diameter range and to insure an oil and watertight seal

**SPEC-grade**

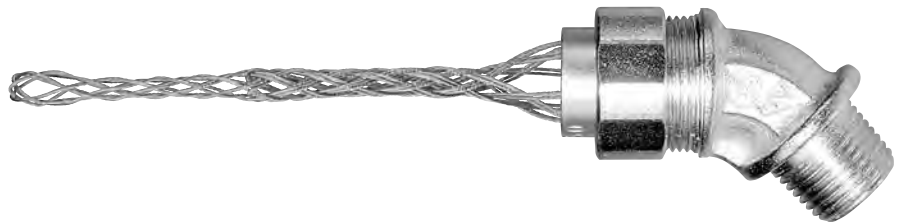

### 45° Angle Connectors

Cat. #	Color	Size	Cable Ranges		Std Pkg	WT/ 100
			Min.	Max		
CG50A25045GT	Red	1/2"	.150	.250	5	25
CG50A35045GT	White	1/2"	.250	.350	5	25
CG50A45045GT	Blue	1/2"	.350	.450	5	25
CG50A56045GT	Green	1/2"	.450	.560	5	25
CG50A65045GT	Brown	1/2"	.560	.650	5	25
CG75A25045GT	Red	3/4"	.150	.250	5	40
CG75A35045GT	White	3/4"	.250	.350	5	40
CG75A45045GT	Blue	3/4"	.350	.450	5	40
CG75A56045GT	Green	3/4"	.450	.560	5	40
CG75A65045GT	Brown	3/4"	.560	.650	5	40
CG75B75045GT	Yellow	3/4"	.650	.750	5	40
CG75B85045GT	Purple	3/4"	.750	.850	5	40
CG100B56045GT	Green	1"	.450	.560	5	68
CG100B65045GT	Brown	1"	.560	.650	5	68
CG100B75045GT	Yellow	1"	.650	.750	5	68
CG100B85045GT	Purple	1"	.750	.850	5	68
CG100C95045GT	Grey	1"	.850	.950	5	68
CG100C105045GT	Black	1"	.950	1.050	5	68



## Wide Range Strain Relief Grips

- Galvanized steel mesh
- One piece convenience
- Aluminum body
- Dust proof
- Indoor use

**SPEC-grade**



Cat. #	Size	Cable Ranges		Mesh Length	Std Pkg	WT/ 100
		Min.	Max.			
SR001	1/2" NPT	.220	.320	4.00	5	6
SR002	1/2" NPT	.300	.430	5.25	10	6
SR003	1/2" NPT	.400	.540	6.75	10	7
SR004	3/4" NPT	.520	.730	8.63	10	10
SR005	1" NPT	.700	.970	10.00	5	15
SR006	1-1/4" NPT	.940	1.20	13.00	5	28
SRB008*	1/2" NPT	.220	.320	4.50	5	6
SRB009*	1/2" NPT	.300	.430	5.25	10	6
SRB010*	1/2" NPT	.400	.540	6.75	10	7
SRB011*	3/4" NPT	.520	.730	8.62	10	10
SRB012*	1" NPT	.700	.970	10.00	5	17
SRB013*	1-1/4" NPT	.940	1.25	13.00	5	32
SRB014*	1-1/2" NPT	1.20	1.50	15.50	5	35
SRB015*	2" NPT	1.40	1.75	18.00	2	57
SRB016*	2-1/2" NPT	1.62	2.00	20.50	2	90
SRB017*	2-1/2" NPT	2.00	2.45	22.00	2	92

\*Includes insulating bushing

Wire Mesh SR 8






## Industrial Grade Cord Grips with Stainless Steel Mesh

- Industrial specification grade screw machined steel, zinc plated
- UL rated Liquid Tight
- Multi-weave stainless steel mesh
- Indoor and outdoor use
- Color coded grommet to indicate cable diameter range and to insure an oil and watertight seal



**SPEC-grade**

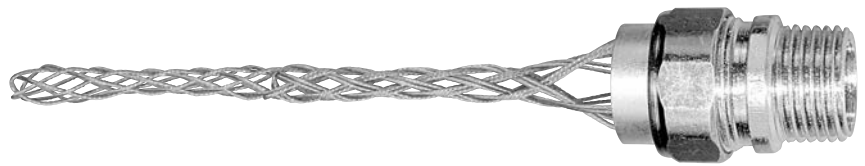

### Straight Connectors

Cat. #	Color	Size	Cable Ranges		Std Pkg	WT/100
			Min.	Max		
CG50A250GT	Red	1/2"	.150	.250	5	10
CG50A350GT	White	1/2"	.250	.350	5	10
CG50A450GT	Blue	1/2"	.350	.450	5	10
CG50A560GT	Green	1/2"	.450	.560	5	10
CG50A650GT	Brown	1/2"	.560	.650	5	10
CG75A250GT	Red	3/4"	.150	.250	5	15
CG75A350GT	White	3/4"	.250	.350	5	15
CG75A450GT	Blue	3/4"	.350	.450	5	15
CG75A560GT	Green	3/4"	.450	.560	5	20
CG75A650GT	Brown	3/4"	.560	.650	5	20
CG75B750GT	Yellow	3/4"	.650	.750	5	20
CG75B850GT	Purple	3/4"	.750	.850	5	25
CG100B560GT	Green	1"	.450	.560	5	30
CG100B650GT	Brown	1"	.560	.650	5	30
CG100B750GT	Yellow	1"	.650	.750	5	30
CG100B850GT	Purple	1"	.750	.850	5	35
CG100C950GT	Grey	1"	.850	.950	5	35
CG100C1050GT	Black	1"	.950	1.050	5	40

Larger size cord grips with mesh available upon request



## Industrial Grade Cord Grips with Stainless Steel Mesh

- Industrial specification grade screw machined steel, zinc plated
- UL rated Liquid Tight
- Multi-weave stainless steel mesh
- Indoor and outdoor use
- Color coded grommet to indicate cable diameter range and to insure an oil and watertight seal

**SPEC-grade**



### Straight Connectors

Cat. #	Color	Size	Cable Ranges		Std Pkg	WT/ 100
			Min.	Max		
CG125C850GT	Purple	1-1/4"	.750	.850	5	48
CG125C950GT	Grey	1-1/4"	.850	.950	5	48
CG125D1050GT	Black	1-1/4"	.950	1.050	5	48
CG125D1150GT	Orange	1-1/4"	1.050	1.150	5	48
CG125D1250GT	Red	1-1/4"	1.150	1.250	5	48
CG125D1375GT	White	1-1/4"	1.250	1.375	5	48
CG150D1050GT	Black	1-1/2"	.950	1.050	2	90
CG150D1150GT	Orange	1-1/2"	1.050	1.150	2	90
CG150D1250GT	Red	1-1/2"	1.150	1.250	2	90
CG150D1375GT	White	1-1/2"	1.250	1.375	2	90
CG150E1500GT	Blue	1-1/2"	1.380	1.500	2	90
CG150E1630GT	Green	1-1/2"	1.500	1.630	2	90
CG150E1750GT	Brown	1-1/2"	1.630	1.750	2	90
CG150E1880GT	Purple	1-1/2"	1.750	1.880	2	90
CG200F1380GT	Red	2"	1.250	1.380	2	125
CG200F1500GT	Blue	2"	1.380	1.500	2	125
CG200F1630GT	Green	2"	1.500	1.630	2	125
CG200F1750GT	Brown	2"	1.630	1.750	2	125
CG200F1810GT	Yellow	2"	1.690	1.810	2	125
CG200F1880GT	Purple	2"	1.750	1.880	2	125
CG200F1940GT	White	2"	1.810	1.940	2	125
CG200F2060GT	Orange	2"	1.940	2.060	2	125

\*\* Cable jacket may have to be stripped to pass through connector body

Wire Mesh CG 4.2