



THE NEW GOLD STANDARD in RAIN TIGHT EMT FITTINGS
AMFICO GOLD PLATED COMPRESSION RT CONNECTORS

EMT Connectors Compression Type/Raintight

- RAIN AND CONCRETE TIGHT 1/2" to 4"
- For use in wet locations to ground and secure EMT raceway boxes and enclosures
- Connector utilizes internal and external sealing rings to prevent entrance of water or moisture
- Screw machined steel, gold zinc plated *

SPEC grade



Featuring:
EZ-Torque Compression Nut


AMFICO distinctive design features a unique zinc gold plated compression nut. This enables inspectors to visually inspect rain tight conformance from a distance. Rain tight close-up inspection is no longer required when you use the AMFICO Gold Standard.



E101868

EMT Connector Compression - Raintight (EC RT)

| Cat. # | Size | Unit Ctn | Std Pkg | WT/100 |
|-----------|--------|----------|---------|--------|
| EC750USRT | 1/2" | 50 | 250 | 8 |
| EC751USRT | 3/4" | 25 | 250 | 12 |
| EC752USRT | 1" | 20 | 100 | 19 |
| EC753USRT | 1-1/4" | 5 | 50 | 30 |
| EC754USRT | 1-1/2" | 5 | 25 | 46 |
| EC755USRT | 2" | 5 | 25 | 55 |
| EC756USRT | 2 1/2" | - | 5 | 217 |
| EC757USRT | 3" | - | 3 | 260 |
| EC758USRT | 3 1/2" | - | 3 | 332 |
| EC759USRT | 4" | - | 2 | 377 |

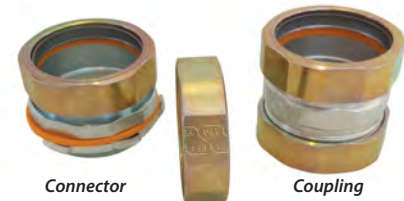

Connector
Compression Nut Grips Tight & Right
Coupling

* Fittings 2 1/2" & Larger May Be Steel or Malleable Iron
Dimensional Table

| Cat. # | A Diameter | B Length | C Length of Thread |
|-----------|------------|----------|--------------------|
| EC750USRT | 1.750 | 1.250 | .406 |
| EC751USRT | 1.813 | 1.563 | .406 |
| EC752USRT | 2.000 | 1.813 | .406 |
| EC753USRT | 2.750 | 2.188 | .500 |
| EC754USRT | 3.000 | 2.438 | .500 |
| EC755USRT | 3.188 | 2.938 | .688 |

With Insulated Throat

| Cat. # | Size | Unit Ctn | Std Pkg | WT/100 |
|------------|--------|----------|---------|--------|
| EC750BUSRT | 1/2" | 50 | 250 | 8 |
| EC751BUSRT | 3/4" | 25 | 250 | 12 |
| EC752BUSRT | 1" | 20 | 100 | 19 |
| EC753BUSRT | 1-1/4" | 5 | 50 | 30 |
| EC754BUSRT | 1-1/2" | 5 | 25 | 46 |
| EC755BUSRT | 2" | 5 | 25 | 55 |
| EC756BUSRT | 2 1/2" | - | 5 | 217 |
| EC757BUSRT | 3" | - | 3 | 260 |
| EC758BUSRT | 3 1/2" | - | 3 | 332 |
| EC759BUSRT | 4" | - | 2 | 377 |

EMT RT Gold Ed. 02.2015.1



**THE NEW GOLD STANDARD in RAIN TIGHT EMT FITTINGS
AMFICO'S GOLD EDITION COMPRESSION RT COUPLINGS**

EMT Couplings
Compression Type/Raintight

- RAIN AND CONCRETE TIGHT 1/2" to 4"
- For use in wet locations to ground and secure EMT raceway boxes and enclosures together
- Coupling utilizes two sealing rings to prevent water seepage
- Screw machined steel, gold zinc plated *



E101868


SPEC-grade



Featuring:
EZ-Torque Compression Nut

Easily identify Rain Tight Connections with our Gold Zinc Plated Compression Nuts

AMFICO distinctive design features a unique zinc gold plated compression nut. This enables inspectors to visually inspect rain tight conformance from a distance. Rain tight close-up inspection is no longer required when you use

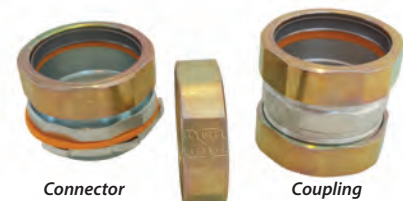

Connector Compression Nut Grips Tight & Right

EMT Couplings - Raintight (EC-RT)

| Cat. # | Size | Unit Ctn | Std Pkg | WT/ 100 |
|-----------|--------|----------|---------|---------|
| EC760USRT | 1/2" | 50 | 250 | 8 |
| EC761USRT | 3/4" | 25 | 125 | 13 |
| EC762USRT | 1" | 20 | 100 | 19 |
| EC763USRT | 1-1/4" | 5 | 50 | 30 |
| EC764USRT | 1-1/2" | 5 | 25 | 46 |
| EC765USRT | 2" | 5 | 25 | 60 |
| EC766USRT | 2-1/2" | - | 5 | 333 |
| EC767USRT | 3" | - | 3 | 367 |
| EC768USRT | 3-1/2" | - | 3 | 426 |
| EC769USRT | 4" | - | 2 | 523 |

Dimensional Table

| Cat. # | Length | Diameter |
|-----------|--------|----------|
| EC760USRT | 1.688 | 1.250 |
| EC761USRT | 2.000 | 1.563 |
| EC762USRT | 2.125 | 1.813 |
| EC763USRT | 3.063 | 2.188 |
| EC764USRT | 3.125 | 2.438 |
| EC765USRT | 3.375 | 2.938 |

* Fittings 2 1/2" & Larger May Be Steel or Malleable Iron