




Liquid Tight Connectors with Stainless Steel Mesh Grips

- Prevents pullout from motion, strain and stress
- Multi-weave stainless steel mesh
- Suitable for hazardous locations, Class I, Div. 2; Class II, Div. 1&2; Class III, Div. 1&2
- Sealing washer and locknut included
- Includes insulated throat
- Reusable

SPEC-grade

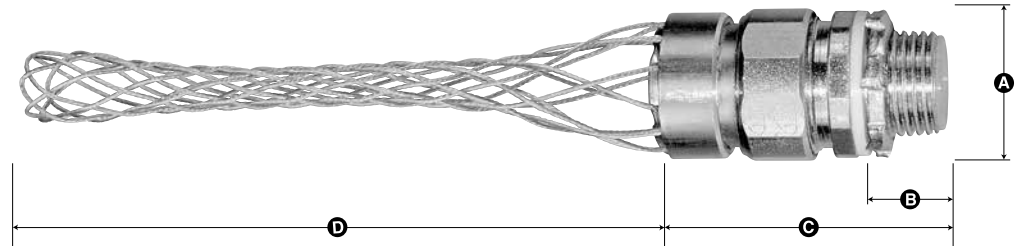

Straight Connectors

| Cat. # | Size | Std Pkg | WT/100 |
|----------|--------|---------|--------|
| STR38GT | 3/8" | 10 | 15 |
| STR50GT | 1/2" | 10 | 20 |
| STR75GT | 3/4" | 10 | 25 |
| STR100GT | 1" | 10 | 35 |
| STR125GT | 1-1/4" | 2 | 60 |
| STR150GT | 1-1/2" | 2 | 85 |
| STR200GT | 2" | 2 | 130 |

Dimensional Table

| Cat. # | A Diameter | B Length of Thread | C Connector Length | D Mesh Length |
|----------|------------|--------------------|--------------------|---------------|
| STR38GT | 1.06 | .59 | 1.43 | 6.00 |
| STR50GT | 1.19 | .59 | 1.43 | 5.25 |
| STR75GT | 1.38 | .59 | 1.56 | 6.50 |
| STR100GT | 1.69 | .66 | 1.69 | 7.75 |
| STR125GT | 2.06 | .63 | 2.03 | 10.63 |
| STR150GT | 2.38 | .63 | 2.22 | 11.00 |
| STR200GT | 2.88 | .66 | 2.28 | 14.00 |

Wire Mesh LT 1

*Larger sizes available upon request



Made in the USA Since 1946

Liquid Tight Connectors with Stainless Steel Mesh Grips

- Prevents pullout from motion, strain and stress
- Multi-weave stainless steel mesh
- Suitable for hazardous locations, Class I, Div. 2; Class II, Div. 1&2; Class III, Div. 1&2
- Sealing washer and locknut included
- Includes insulated throat
- Reusable


SPEC-grade



E93605



LR61799

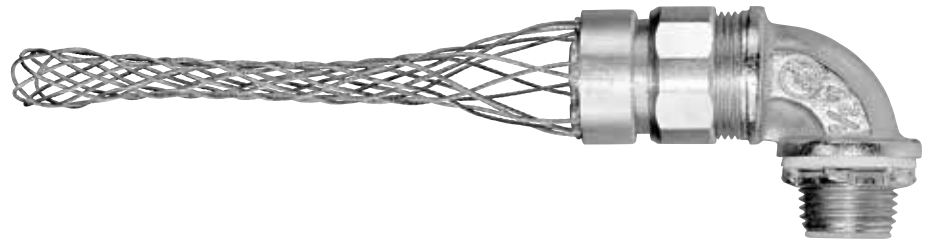

90° Angle

| Cat. # | Size | Std Pkg | WT/100 |
|------------|--------|---------|--------|
| STR3890GT | 3/8" | 10 | 25 |
| STR5090GT | 1/2" | 10 | 25 |
| STR7590GT | 3/4" | 10 | 40 |
| STR10090GT | 1" | 10 | 70 |
| STR12590GT | 1-1/4" | 2 | 95 |
| STR15090GT | 1-1/2" | 2 | 130 |
| STR20090GT | 2" | 2 | 195 |

* Larger sizes available upon request

Dimensional Table

| Cat. # | Mesh Length |
|------------|-------------|
| STR3890GT | 6.00 |
| STR5090GT | 5.25 |
| STR7590GT | 6.50 |
| STR10090GT | 7.75 |
| STR12590GT | 10.63 |
| STR15090GT | 11.00 |
| STR20090GT | 14.00 |

Wire Mesh IT SS 2



Made in the USA Since 1946

Liquid Tight Connectors with Stainless Steel Mesh Grips

- Prevents pullout from motion, strain and stress
- Multi-weave stainless steel mesh
- Suitable for hazardous locations, Class I, Div. 2; Class II, Div. 1&2; Class III, Div. 1&2
- Sealing washer and locknut included
- Includes insulated throat
- Reusable


SPEC-grade



E93605



LR61799

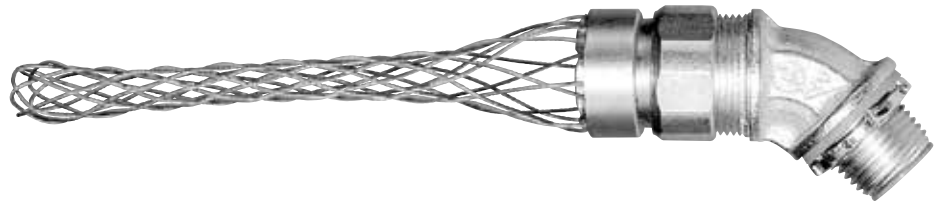

45° Angle

| Cat. # | Size | Std Pkg | WT/ 100 |
|------------|--------|---------|---------|
| STR3845GT | 3/8" | 10 | 20 |
| STR5045GT | 1/2" | 10 | 22 |
| STR7545GT | 3/4" | 10 | 35 |
| STR10045GT | 1" | 10 | 65 |
| STR12545GT | 1-1/4" | 2 | 85 |
| STR15045GT | 1-1/2" | 2 | 115 |
| STR20045GT | 2" | 2 | 175 |

Dimensional Table

| Cat. # | Mesh Length |
|------------|-------------|
| STR3845GT | 6.00 |
| STR5045GT | 5.25 |
| STR7545GT | 6.50 |
| STR10045GT | 7.75 |
| STR12545GT | 10.63 |
| STR15045GT | 11.00 |
| STR20045GT | 14.00 |

* Larger sizes available upon request

Wire Mesh IT SS 3