

AMERICAN FITTINGS

Rigid Conduit 3 Piece Couplings



Since 1946

SPEC-grade™

Size Range: 1/2" - 4" Alloy Steel
ER Series Erickson 3 Piece Couplings Rain Tight
 For Both Rigid and IMC Conduit
 UL Listed RainTight and Concrete Tight
 Engineered to Lock Tight and Right

Features:
 ER Series: EZTorque Compression Nuts
 Precision Machined Solid Alloy Steel
 RainTight Construction
 Zinc Plated,
 Galvanized Plating Option Available *



*3-Piece Couplings Are Used To:
 Join 2 lengths of threaded conduit; the coupling
 couples conduit when conduit cannot be turned*

*Our Standard Couplings are
 Concrete Tight AND Rain Tight*

"Join Steel with Steel"

Steel Fitting for Rigid Steel Conduit

Precision machined cut threads will not deform or flatten when fully torqued to maintain integrity of the connection.

AMFICO's unique flat hex surface for easy installation on conduit.

A fully machined fitting guarantees all 3 pieces with the uniformity of the centerline to both sides of the conduit.

AMFICO Alloy Steel Rigid 3 Piece Couplings Rain Tight

Cat # *	Trade Size	Description	Box Qty.	Carton Qty	Wt/c.	UPC Code
ER 50RT	1/2	Steel 3 Piece Coupling for Rigid Conduit	20	200	12	662364 90050
ER 75RT	3/4	Steel 3 Piece Coupling for Rigid Conduit	20	100	16	662364 90075
ER100RT	1	Steel 3 Piece Coupling for Rigid Conduit	5	50	28	662364 90100
ER125RT	1 1/4	Steel 3 Piece Coupling for Rigid Conduit	5	25	49	662364 90125
ER150RT	1 1/2	Steel 3 Piece Coupling for Rigid Conduit	5	25	62	662364 90150
ER200RT	2	Steel 3 Piece Coupling for Rigid Conduit	5	25	88	662364 90200
ER250RT	2 1/2	Steel 3 Piece Coupling for Rigid Conduit		5	148	662364 90251
ER300RT	3	Steel 3 Piece Coupling for Rigid Conduit		5	183	662364 90301
ER350RT	3 1/2	Steel 3 Piece Coupling for Rigid Conduit		4	212	662364 90351
ER400RT	4	Steel 3 Piece Coupling for Rigid Conduit		2	454	662364 90401

Compliances:

Certified Made in the USA
 UL 514B
 NEMA Standard FB1
 Certified for MIL-STD 810 Sinusoidal Vibrations
 Federal Standard A-A-50553
 UL Standards: 514B, 467
 CSA Standard: C22.2 No. 18F
 RoHS Compliant



Options:

* **Galvanized Plating Option:** add suffix "G" to cat #; i.e.ER250RTG.
*Note: Galvanizing, Minimum quantities may apply and
 RT compression nuts cannot be gold toned.
 Consult factory for details.*

Dimensional Cut Sheets Available Online at amftgs.com

AMFTGS.com

t: 800.221.5268

e:info@amftgs.com

AMERICAN FITTINGS

Rigid Conduit 3 Piece Couplings




Since 1946

SPEC-grade™

Size Range: 1/2" - 4" Alloy Steel Construction
ER Series Erickson 3 Piece Couplings Rain Tight
 For Both Rigid and IMC Conduit
 UL Listed RainTight and Concrete Tight
 Engineered to Lock Tight and Right

Features:
 ER Series: EZTorque Compression Nuts
 Precision Machined Solid Alloy Steel Bar
 RainTight Construction
 Zinc Plated,
 Galvanized Plating Option Available *

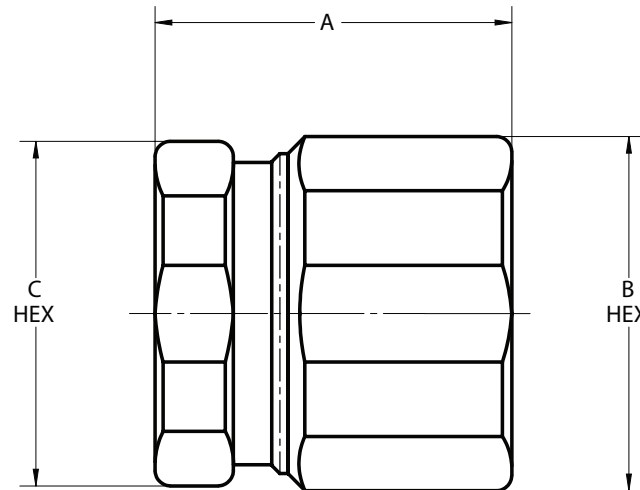

Packaging

Cat. #	Trade Size	A Length	B - hex	C - hex	Unit Ctn	Std Ctn	WT/ 100
ER50	1/2"	1-1/16	1-1/8	1-1/32	20	200	15
ER75	3/4"	1-3/32	1-11/32	1-13/64	20	100	17
ER100	1"	1-3/8	1-5/8	1-9/16	5	50	36
ER125	1-1/4"	1-11/16	2-1/32	1-61/64	5	25	52
ER150	1-1/2"	1-3/4	2-9/32	2-3/16	5	25	68
ER200	2"	1-7/8	2-25/32	2-21/32	5	25	90
ER250	2-1/2"	2-7/16	3-1/4	3-1/4	-	5	150
ER300	3"	2-7/16	3-29/32	3-29/32	-	5	180
ER350	3-1/2"	2-21/32	4-13/32	4-13/32	-	4	318
ER400	4"	2-21/32	4-29/32	4-29/32	-	2	358

Compliances:

Certified Made in the USA
 UL 514B
 NEMA Standard FB1
 Certified for MIL-STD 810 Sinusoidal Vibrations
 Federal Standard A-A-50553
 UL Standards: 514B, 467
 CSA Standard: C22.2 No. 18F
 RoHS Compliant



Options:

* **Galvanized Plating Option:** add suffix "G" to cat #; i.e.ER250RTG.
 Note: Galvanizing, Minimum quantities may apply and
 RT compression nuts cannot be gold toned.
 Consult factory for details.