

Adapter Steel Rigid Conduit to LT

Size Range: 1/2" - 4"

Product Series: STRNT- Compression to Liquid Tight Conduit

Rain Tight Option *

Material: Solid Alloy Steel Construction

Zinc Plated with Chromate Finish **

Made in the USA

Precision Machined from Solid Alloy Bar Stock
Machined Cut Threads
Full Compression EZ Torque Nuts


Long Ferrule on LT End Provides Continual Ground
and Stability Against Pull Out

Industrial SPEC-grade
Converts Flexible LT conduit to Rigid Steel
Conduit Outdoor and Indoor Use with
flexible metallic LT conduit or
Type A flexible non-metallic LT conduit.




Split Conduit Coupling Rigid Compression to Liquid Tight

TWICE the Strength and Durability of Die Cast & Malleable Iron Products

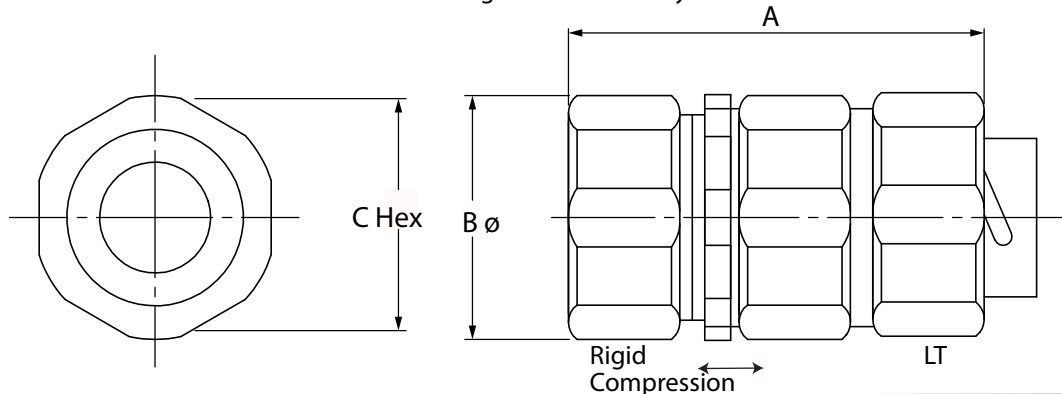

Shown RT Version with
Gold Toned Nuts -Suffix RT



Cat # *	Trade Size	A	B ø	C Hex	Wt. Per/C
STRNT50	1/2"	1-11/16"	1-3/16"	1-1/8"	16
STRNT75	3/4"	2-1/4"	1-7/16"	1-3/8"	34
STRNT100	1"	2-9/16"	1-3/4"	1-11/16"	59
STRNT125	1-1/4"	3-3/16"	2-3/16"	2-1/16"	93
STRNT150	1-1/2"	3-9/16"	2-3/8"	2-5/16"	117
STRNT200	2"	3-5/8"	2-7/8"	2-3/4"	153
STRNT250	2-1/2"	5-3/16"	3-7/16"	3-1/4"	274
STRNT300	3"	5-5/16"	4"	3-15/16"	402
STRNT350	3-1/2"	5-5/16"	4-9/16"	4-7/16"	448
STRNT400	4"	5-3/8"	5-1/8"	4-15/16"	568

Compliances:

Certified Made in the USA
UL 514B, 467
Concrete Tight and Rain Tight
Suitable for Direct Burial
NEMA Standard FB1
Federal Standard A-A-50553
CSA Standard: C22.2 No. 18F
RoHS Compliant
REACH Compliant
CA Prop 65 Compliant
UNSPSC 39131707



Available OPTIONS:

* Rain Tight (as shown) Option Add Suffix RT to Above Cat. Number

** Galvanized Plating - Option
For this Option, Add Suffix "G" to Above Cat Number

Also Offered As:

- LT to Rigid - Threaded
- LT to EMT - Compression
- LT to FMC - FLX